


Convex Circular and Roundtangular Mirror Installation and Cleaning Instructions

Hardware Provided

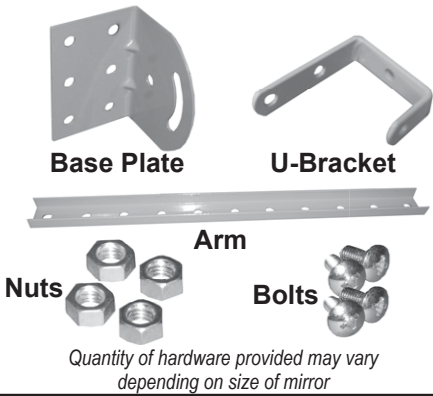


- Obtain the proper screws (not included) for the surface to which the mirror will be mounted
- 1/4" wood screws for wood mounting
 - 1/4" nuts and bolts for metal girders or I-beams
 - 1/4" toggle bolts for drywall or plaster surfaces ** SEE NOTE BELOW
 - 1/4" masonry screws for concrete

** Mounting to drywall or plaster walls or ceilings not recommended for mirrors larger than 18" in diameter unless mounting screws are used to attach the mounting bracket directly to a wall stud.


Tools: You will need the following tools to assemble and mount the mirror – power drill, drill bit, safety glasses, screw driver, and pliers or wrench

Determine if you need to use the base plate and arm. The base plate and arm are needed when the mirror needs to extend out from a wall or mirror is be mounted on the ceiling. Otherwise, use only the wall mount U-bracket.

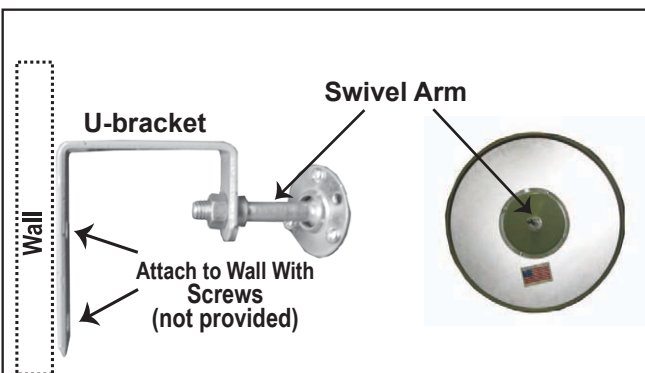

U-Bracket Only Installation:

1. Use the U-bracket to mark the mounting holes on the mounting surface.
2. Using a drill bit slightly smaller than the screws you plan to use, drill pilot holes. Attach the bracket or base plate with appropriate screws.
3. Attach U-bracket to the mounting surface.
4. Remove nut from swivel arm and place end of swivel arm on the U-bracket. Replace nut and tighten.

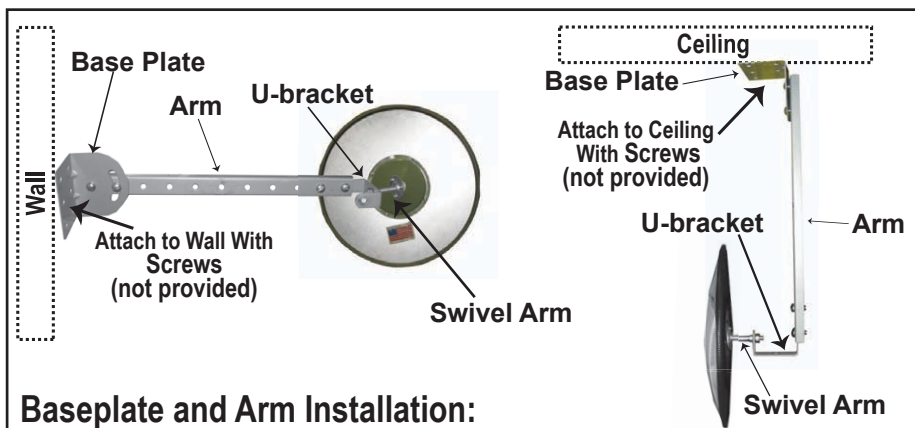

Baseplate and Arm Installation:

1. Use the base plate to mark the mounting holes on the mounting surface.
2. Using a drill bit slightly smaller than the screws you plan to use, drill pilot holes. Attach the base plate with appropriate screws.
3. Attach the arm to the base plate with 2 bolts and 2 nuts. Attach the U- bracket to the arm with 2 bolts and 2 nuts.
4. Remove nut from swivel arm and place end of swivel arm on the U-bracket. Replace nut and tighten.

Adjusting the mirror: Adjust the mirror to the desired angle by loosening the 3 screws on the ball swivel on the mirror mounting plate. To hold the mirror in position tighten the screws.

IMPORTANT: DO NOT ATTEMPT TO ADJUST THE MIRROR ANGLE WITHOUT LOOSENING THE SCREWS.

Cleaning:

Mirrors may be cleaned with a soft cloth dampened with water.

Applying Pledge® spray wax to the surface and wiping with a clean, soft cloth once or twice a year is recommended to reduce static and keep the mirror's high gloss finish.

Scratches can be removed by applying Novus® Plastic Polish #2 or Turtle® Wax white polishing compound to the mirror.

CAUTION - Never use ammonia type liquids or abrasive cleaning agents

Adjustment Screw

